




- d. Measure the amplitude and period of the highest amplitude phase. To get the amplitude (A) we measure the largest peak-to-trough value and divide by 2. For the period (T), measure the time difference between the same peak and trough and multiply by 2:

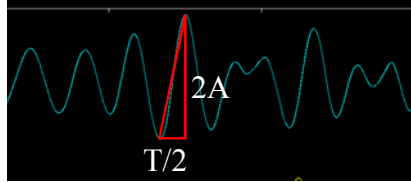


To measure the values accurately go into picking mode (click on “pick...”). Now when you click on the peak or trough the exact amplitude and time are shown in the top corner. The amplitude must be in  $\mu\text{m}$  (the scale on the recording is nm, so you’ll have to divide by 1000) and the period in seconds.

- e. Calculate mb using


$$mb = \log (A/T)_{\max} + Q(\Delta, h)$$

with Q taken from the figure below, x-axis = distance (which is 62.30), y-axis = hypocentral depth (which is  $\sim 30$  km)

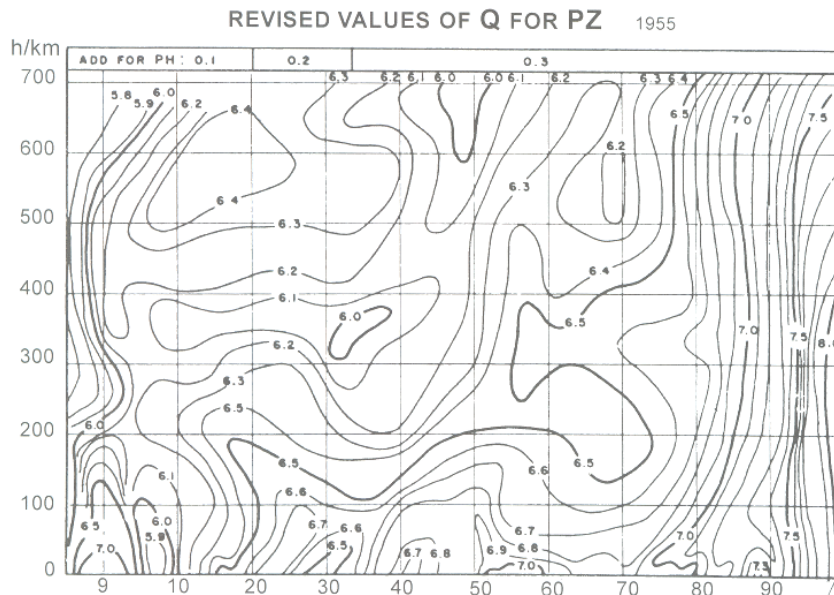

4. Calculate  $M_s$  (using the IASPEI standard measure, i.e. unfiltered data on either vertical or horizontal components)
- Click on the file menu and “reset active” to remove filtering.
  - Click on “remove mean” and “Integrate” to convert from velocity seismograms to displacement.
  - Zoom in on the area of surface waves with the highest amplitudes.
  - We will calculate  $M_s$  for both the horizontal and the vertical ground motion, but we have to use the same wave cycle for each component, so identify the part of the trace with the highest horizontal and vertical

amplitudes:

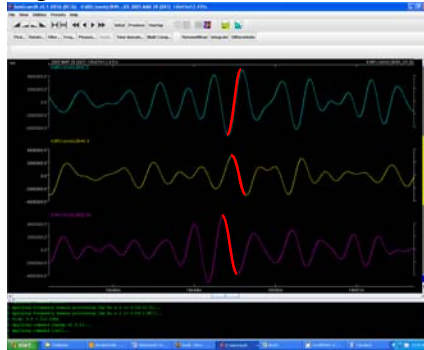


- e. Measure the amplitude and period of the highest amplitude phase.
- f. Calculate the vertical Ms value (MLV) from the amplitude and period of the vertical trace using:  

$$M_s = \log(A/T)_{\max} + 1.66\log(\Delta) + 3.3,$$
 where  $\Delta$  is the distance between the earthquake and the seismometer in degrees (which is 62.30).
- g. To calculate the horizontal Ms (MLH) combine the east and north components using  $A_{\text{horizontal}} = \sqrt{A_{\text{east}}^2 + A_{\text{north}}^2}$ . To get the period calculate the average from the north and east components. Then calculate the magnitude using  $M_s = \log(A/T)_{\max} + 1.66\log(\Delta) + 3.3$  again.
- h. To get a single Ms value for the station, take the average of MLV and MLH. Given that this value is quite uncertain give the final magnitude to one decimal point. Compare your mb and Ms magnitudes.

## Answers and Comments


1. Identify the P, S and surface waves.

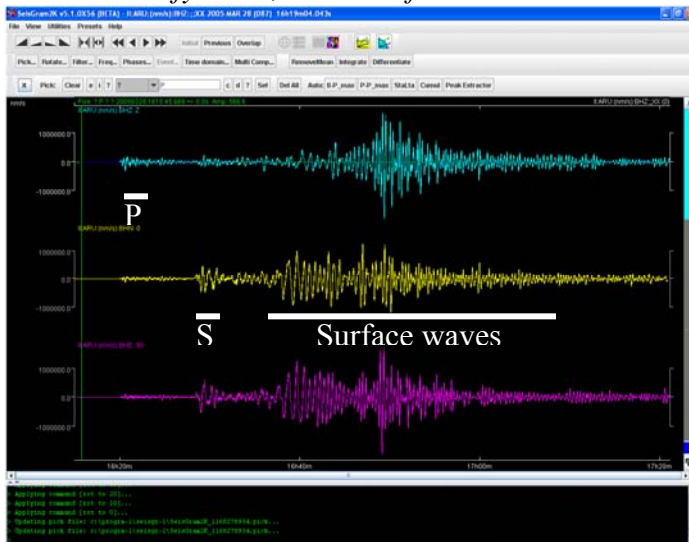

2. Calculate mb:

- d.  $A=20.4 \mu\text{m}$ ,  $T= 2.6 \text{ sec}$

e.  $mb = \log(20.4/2.6) + 6.8 = 7.7$

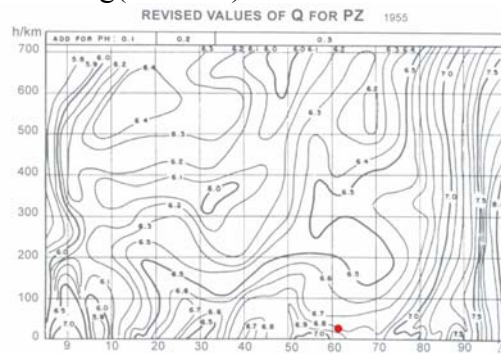

3. Calculate  $M_s$ :

e.  $A_v = 6714 \mu\text{m}$ ,  $T_v = 21.44 \text{ sec}$

$A_n = 4323 \mu\text{m}$ ,  $T_n = 21.44 \text{ sec}$

$A_e = 6186 \mu\text{m}$ ,  $T_e = 22.49 \text{ sec}$

f.  $MLV = \log(6714/21.44) + 1.66\log(62.3) + 3.3 = 8.77$

g.  $MLH = \log(7547/21.97) + 1.66\log(62.3) + 3.3 = 8.81$

h. From this data  $M_s = 8.8$

Other published magnitudes for this event are:

USGS/NEIC  $M_w = 8.7$ ,

Harvard CMT:  $M_w = 8.6$ ,  $mb = 7.2$ ,  $M_s = 8.4$